



# EAGLE TRAFFIC CONTROL SYSTEMS

A DIVISION OF  BROWN  
Traffic Products, Inc.


## TS-2 CABINET COMPONENTS BIU, CPS, & CDR

### Bus Interface Unit (P/N BIU200)

The Bus Interface Unit (BIU) is an interface between Port 1 of the Controller and the terminal facility and loop detector racks. Port 1 uses a SDLC (synchronous data link) communication protocol with a bit rate of 153.6 Kb per second. The BIU's functions include controlling field I/O to and from the controller. The BIU meets the specifications of NEMA TS2-1998, Section 8.

#### Specifications

<i>Dimensions:</i>	2.34"W x 4.5"H x 6.5L (59 mm W x 144 mm H X 165 mm L)
<i>Power Requirements:</i>	24VDC +/- 2VDC
<i>Indicators:</i>	Supply Voltage, Port 1 Transmitting,
<i>Interface:</i>	Port 1, a 15 pin "D" female connector
<i>Inputs/Outputs:</i>	8 inputs 4 optical inputs 15 outputs 24 input/outputs

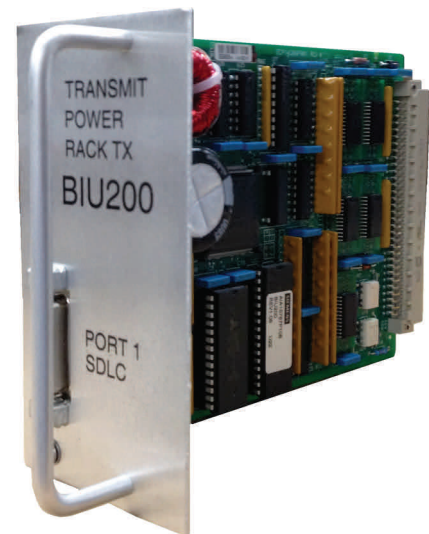

### Cabinet Power Supply (P/N CPS105)

The Cabinet Power Supply (CPS) provides a regulated DC power, an unregulated AC power and a line frequency reference for the BIUs, load switches, detector racks and other auxiliary equipment within the cabinet. The Cabinet Power Supply is shelf mounted. The CPS meets the specifications of NEMA TS2-1998, Section 5, and exceeds the TXDOT TS-2 2003 addendum.

#### Specifications

<i>Dimensions:</i>	9"W x 4.0"H x 6.75"L (229 mm W x 102 mm H x 171 mm L)
<i>Power Requirements:</i>	89 VAC to 135 VAC
<i>Interface:</i>	MS3106-18-IPW
<i>Outputs:</i>	+12 VDC @ 2.0 Amps/ 5.0 Amps* +24 VDC @ 2.0 Amps/ 3.0 Amps* 12 VAC @ 0.25 Amps Line Frequency Reference Test jacks for 24 VDC
<i>Indicators:</i>	24 VDC 12 VDC 12 VAC Line Frequency



# CABINET DETECTOR RACKS

The Cabinet Detector Rack (CDR) provides housing and circuitry for one (1) BIU and up to 16 channels of detection (8 two channel or 4 four channel detector cards). The CDR is programmable for any of the four (4) TS2 defined detector rack addresses. A 37-pin connector is attached to the printed circuit board for designated inputs/outputs. Other models are available with 4 channels of optical detection and external vehicle detector inputs.

**CDR100** - 16 channel, 8 position rack. Requires ABW12062P008 (8ft) or ABW12062P010 (10ft) cable. **Dimensions:** 14.6"W x 5.4"H x 7.5"D

**CDR101** - 8 channel, 4 position rack. Requires ABW12303P006 (6ft) or ABW12303P001 (7.5ft). **Dimensions:** 9.8"W x 5.9"H x 7.1"D

**AAD12047P001** - 16 channel, 10 position rack. Requires ABW12062P008 (8ft) or ABW12062P010 (10ft) cable. Optional ABW12047P002 allows for 4 additional channels of preempt detection (and Opticom compatibility). Optional ABW12047P001 allows for momentary push button detector call capability (Opticom, Tomar, or standard preempt compatible). **Dimensions:** 17"W x 7.1"D x 5.9"H

## CDR Connector Pin Assignment

### CDR100

Pin	Function
1	Detector 1/2, Loop 1 - A
2	Detector 1/2, Loop 1 - B
3	Detector 1/2, Loop 2 - A
4	Detector 1/2, Loop 2 - B
5	Detector 1/2, Loop 3 - A
6	Detector 1/2, Loop 3 - B
7	Detector 1/2, Loop 4 - A
8	Detector 1/2, Loop 4 - B
9	Detector 3/4, Loop 1 - A
10	Detector 3/4, Loop 1 - B
11	Detector 3/4, Loop 2 - A
12	Detector 3/4, Loop 2 - B
13	Detector 3/4, Loop 3 - A
14	Detector 3/4, Loop 3 - B
15	Detector 3/4, Loop 4 - A
16	Detector 3/4, Loop 4 - B
17	Detector 5/6, Loop 1 - A
18	Detector 5/6, Loop 1 - B
19	Detector 5/6, Loop 2 - A
20	Detector 5/6, Loop 2 - B
21	Detector 5/6, Loop 3 - A
22	Detector 5/6, Loop 3 - B
23	Detector 5/6, Loop 4 - A
24	Detector 5/6, Loop 4 - B
25	Detector 7/8, Loop 1 - A
26	Detector 7/8, Loop 1 - B
27	Detector 7/8, Loop 2 - A
28	Detector 7/8, Loop 2 - B
29	Detector 7/8, Loop 3 - A
30	Detector 7/8, Loop 3 - B
31	Detector 7/8, Loop 4 - A
32	Detector 7/8, Loop 4 - B
33	+ 12 volts D.C.
34	Logic Common
35	+ 24 volts D.C.
36	Line Frequency Reference
37	Equipment Ground

\* Only channels 1-16 and 33-34 are available for use with the CDR101 rack.

### ABW12047P001


Pin	Function
1	Channel 1 Call
2	Channel 2 Call
3	Channel 3 Call
4	Channel 4 Call
5	Channel 5 Call
6	Channel 6 Call
7	Channel 7 Call
8	Channel 8 Call
9	Channel 9 Call
10	Channel 10 Call
11	Channel 11 Call
12	Channel 12 Call
13	Channel 13 Call
14	Channel 14 Call
15	Channel 15 Call
16	Channel 16 Call

### ABW12047P002


Pin	Function
1	**
2	**
3	**
4	1A Detector
5	+24 #1
6	1A Out (C)
7	1B Detector
8	DC- #1
9	**
10	2A Detector
11	+24 #2
12	2A Out (C)
13	2B Detector
14	DC- #2
15	1B Out (C)
16	2B Out (C)
17	1A Out (E)
18	1B Out (E)
19	2A Out (E)
20	2B Out (E)

\*\* Not Used

### CDR100

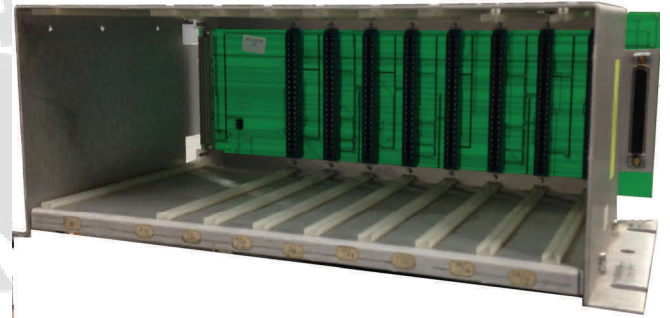

### AAD12047P001

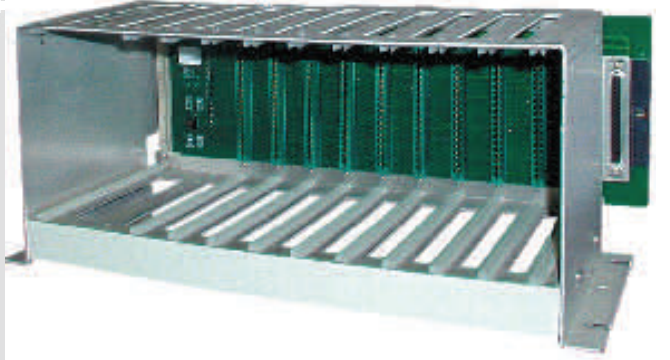

Eagle cabinets and accessories are built with the highest standards in quality and manufacturing. With a long standing history of technological innovations, well renowned customer service, and high quality products and services, Eagle is the leader in traffic technology products and solutions. For more information on our product line see our website at [www.browntraffic.com](http://www.browntraffic.com)

### Detector Loop Hook-Up Panel (PC Board)

AAD14972P001	16 Channel Hook-Up Panel
ABW14503P0XX*	16 Channel Loop Harness
ABW14665P0XX*	Opticom Harness

Note: Other special Loop Hook-Up Panels are available. Please contact your representative.  
\*XX = Length in feet of cable

### SDLC Cable/Hook-Up Panel (PC. Board)

ABW14652P0XX*	SDLC Harness
AAD14753P003	6 Position
AAD14753P001	8 Position

\*XX = Length in feet of cable