

# 50,000-Count Digital Multimeter Models MX53<sup>III</sup>, MX54<sup>III</sup>, MX55<sup>III</sup> & MX56<sup>III</sup>



The Models MX53, MX54, MX55 and MX 56 are hand-held professional digital multimeters that measure up to the toughest standards. They are built into a rugged housing which provides a separate battery and fuse compartment to isolate the DMM's electronics from contamination. These meters offer a complete set of measurement ranges and are in compliance with international safety and quality standards to ensure a professional and reliable measuring tool.

These True RMS (AC or AC + DC) meters provide accurate measurements of non-sinusoidal waveforms.

They all measure AC Amps, AC Volts, DC Amps, DC Volts, Resistance, Continuity, Capacitance, Frequency and have a Diode Test function. AC Voltage measurement can be displayed in Volts, in dB or in resistance power. Once the load impedance has been programmed the multimeter automatically calculates the value in dB and the power consumed (VA).

The large and easy-to read LCD features a selectable 50,000-count digital display. The display features comprehensive user interface symbols, such as low battery,

Min/Max/Avg and a 34-segment analog bargraph for easy trend readings. Accuracy is 0.025%. All models are equipped with a Data Hold function that freezes the measurement for later viewing. All models are waterproof, IP67 rated as well as CE marked.

All models include a pair of test leads (red/black), 9V Alkaline battery and a user manual.

## Features

- 50,000-count selectable
- Accuracy to 0.025%
- 600VAC/DC volts measurements
- True RMS (AC or AC + DC)
- Selectable to 1G $\Omega$  on the 500mV range
- EN 61010, 600V, Cat. III and 1000V, Cat. II
- IP67 rated
- RS-232 communication available
- Includes rubber holster

## Applications

- Installation, repair or maintenance of industrial equipment
- Design verification of prototypes/production units
- Troubleshooting failures and poor performance
- Quality analysis




Model MX56<sup>III</sup> measuring DC voltages in a signal control panel.

# Specifications

MODELS	MX53™	MX54™	MX55™	MX56™
<b>DC VOLTAGE</b>				
Measurement Range	0.5 to 1000V	0.5 to 1000V	0.5 to 1000V	0.5 to 1000V
Resolution	10 $\mu$ V to 100mV	10 $\mu$ V to 100mV	10 $\mu$ V to 100mV	10 $\mu$ V to 100mV
Basic Accuracy <sup>(1)</sup>	$\pm 0.1\%$ of Reading $\pm 2$ cts	$\pm 0.05\%$ of Reading $\pm 2$ cts	$\pm 0.025\%$ of Reading $\pm 2$ cts	$\pm 0.025\%$ of Reading $\pm 2$ cts
Input Impedance	10M $\Omega$	10M $\Omega$	10M $\Omega$	10M $\Omega$
<b>AC VOLTAGE</b>				
Measurement Range	0.5 to 750V	0.5 to 750V	0.5 to 750V	0.5 to 750V
Resolution	100 $\mu$ V to 1V	10 $\mu$ V to 100mV	10 $\mu$ V to 100mV	10 $\mu$ V to 100mV
Basic Accuracy <sup>(1)</sup>	$\pm 2\%$ of Reading $\pm 3$ cts	$\pm 2\%$ of Reading $\pm 30$ cts	$\pm 2\%$ of Reading $\pm 30$ cts	$\pm 2\%$ of Reading $\pm 30$ cts
Input Impedance	10M $\Omega$	10M $\Omega$	10M $\Omega$	10M $\Omega$
<b>DC CURRENT</b>				
Measurement Range	5mA to 10A	500 $\mu$ A to 10A	500 $\mu$ A to 10A	500 $\mu$ A to 10A
Resolution	100nA to 1mA	10nA to 1mA	10nA to 1mA	10nA to 1mA
Basic Accuracy <sup>(1)</sup>	$\pm 0.2\%$ of Reading $\pm 2$ cts	$\pm 0.05\%$ of Reading $\pm 2$ cts	$\pm 0.05\%$ of Reading $\pm 2$ cts	$\pm 0.05\%$ of Reading $\pm 2$ cts
<b>AC CURRENT</b>				
Measurement Range	5mA to 10A	500 $\mu$ A to 10A	500 $\mu$ A to 10A	500 $\mu$ A to 10A
Resolution	1 $\mu$ A to 10mA	10nA to 1mA	10nA to 1mA	10nA to 1mA
Basic Accuracy <sup>(1)</sup>	$\pm 1\%$ of Reading $\pm 3$ cts	$\pm 0.6\%$ of Reading $\pm 30$ cts	$\pm 0.6\%$ of Reading $\pm 30$ cts	$\pm 0.6\%$ of Reading $\pm 30$ cts
<b>RESISTANCE</b>				
Measurement Range	500 $\Omega$ to 50M $\Omega$	500 $\Omega$ to 50M $\Omega$	500 $\Omega$ to 50M $\Omega$	500 $\Omega$ to 50M $\Omega$
Resolution	10m $\Omega$ to 1k $\Omega$	10m $\Omega$ to 1k $\Omega$	10m $\Omega$ to 1k $\Omega$	10m $\Omega$ to 1k $\Omega$
Basic Accuracy <sup>(1)</sup>	$\pm 0.1\%$ of Reading $\pm 3$ cts	$\pm 0.07\%$ of Reading $\pm 2$ cts	$\pm 0.07\%$ of Reading $\pm 2$ cts	$\pm 0.07\%$ of Reading $\pm 2$ cts
<b>CONTINUITY</b>				
Measurement Range	10 $\Omega$ to 20 $\Omega$	10 $\Omega$ to 20 $\Omega$	10 $\Omega$ to 20 $\Omega$	10 $\Omega$ to 20 $\Omega$
Response Time	1ms	1ms	1ms	1ms
<b>DIODE</b>				
Resolution	1mV	1mV	1mV	1mV
Test Current	1mA $\pm 20\%$	1mA $\pm 20\%$	1mA $\pm 20\%$	1mA $\pm 20\%$
<b>CAPACITANCE</b>				
Measurement Range	50nF to 50mF	50nF to 50mF	50nF to 50mF	50nF to 50mF
Resolution	10pF to 10 $\mu$ F	10pF to 10 $\mu$ F	10pF to 10 $\mu$ F	10pF to 10 $\mu$ F
Basic Accuracy <sup>(1)</sup>	$\pm 1\%$ of Reading $\pm 2$ cts	$\pm 1\%$ of Reading $\pm 2$ cts	$\pm 1\%$ of Reading $\pm 2$ cts	$\pm 1\%$ of Reading $\pm 2$ cts
<b>FREQUENCY</b>				
Measurement Range	0.62Hz to 500kHz	0.62Hz to 500kHz	0.62Hz to 500kHz	0.62Hz to 500kHz
Basic Accuracy <sup>(1)</sup>	0.03% of Reading	0.03% of Reading	0.03% of Reading	0.03% of Reading
<b>dB FUNCTION</b>				
Measurement Range	–	10mV <sub>AC</sub> to 750V <sub>AC</sub>	10mV <sub>AC</sub> to 750V <sub>AC</sub>	10mV <sub>AC</sub> to 750V <sub>AC</sub>
Resolution	–	0.01dB	0.01dB	0.01dB
<b>GENERAL</b>				
Digital Display	50,000-count			
Analog Bargraph	34-segment			
Power Supply	9V Alkaline battery			
Dimensions	7.4 x 3.2 x 1.5" (189 x 82 40mm)			
Weight	0.8 lb (400g)			
<b>ENVIRONMENTAL</b>				
Operating Temperature	14° to 140°F (-10° to 60°C)			
Storage Temperature	-40° to 158°F (-40° to 70°C)			
<b>SAFETY</b>				
Safety Rating	EN 61010			
CE Mark	Yes			

(1) Accuracy dependent on range

# Construction

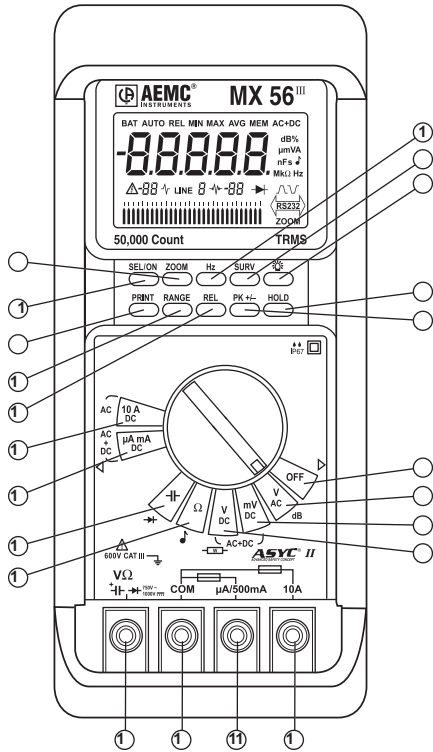

1. Time functions selection
2. Monitoring values selection/display
3. Display backlighting
4. Display hold
5. Peak measurement
6. Power off
7. AC voltage measurement
8. 500mV voltage measurement
9. DC voltage measurement
10. Input terminal range 10A
11. Input terminal range  $\mu$ A, mA
12. Multimeter reference input
13. Input terminal, ranges 11, 12, 13, 14 and 15
14. Resistance measurement
15. Capacitance measurement
16. Current measurement up to 500mA
17. Current measurement up to 10A (Model MX56<sup>III</sup>)
18. Relative mode measurement (Model MX56<sup>III</sup>)
19. Range change
20. Data sending to a printer
21. Power on (selects secondary functions)
22. Bargraph scale magnification



Test Leads included with MX50 Series

## ORDERING INFORMATION

## CATALOG NO.

DMM Model MX53 <sup>III</sup> (50,000-count, TRMS, 0.1% Accuracy, with Holster) . . . . .	Cat. #2116.69
DMM Model MX54 <sup>III</sup> (50,000-count, TRMS, 0.05% Accuracy, with Holster) . . . . .	Cat. #2116.70
DMM Model MX55 <sup>III</sup> (50,000-count, TRMS, 0.025% Accuracy, with Holster) . . . . .	Cat. #2116.71
DMM Model MX56 <sup>III</sup> (50,000-count, TRMS, 0.025% Accuracy, with Holster) . . . . .	Cat. #2116.72

## Contact Us

### United States & Canada:

Chauvin Arnoux®, Inc.  
d.b.a. AEMC® Instruments  
200 Foxborough Blvd.  
Foxborough, MA 02035 USA  
(508) 698-2115 • Fax (508) 698-2118  
www.aemc.com

**Customer Support – for placing an order, obtaining price & delivery:**  
customerservice@aemc.com

**Sales Department – for general sales information:**  
sales@aemc.com

**Repair and Calibration Service – for information on repair & calibration, obtaining a user manual:**  
repair@aemc.com

**Technical and Product Application Support – for technical and application support:**  
techinfo@aemc.com

**Webmaster – for information regarding www.aemc.com:**  
webmaster@aemc.com

### South America, Australia & New Zealand:

Chauvin Arnoux®, Inc.  
d.b.a. AEMC® Instruments  
15 Faraday Drive  
Dover, NH 03820 USA  
(978) 526-7667 • Fax (978) 526-7605  
export@aemc.com

### All other countries:

Chauvin Arnoux  
190, rue Championnet  
75876 Paris Cedex 18, France  
33 1 44 85 45 28 • Fax 33 1 46 27 73 89  
info@chauvin-arnoux.com