TEMPLE, INC. CONTROLLER CABINET WIRED TYPE I

Temple
800.633.3221
www.temple-inc.com

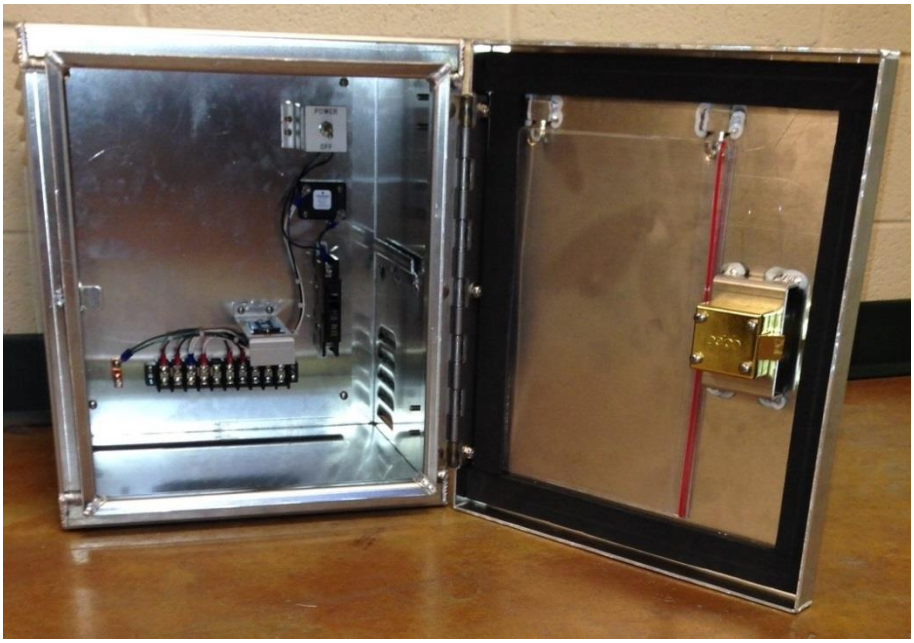

Cabinet Dimensions: 16.4”H x 14.4”W x 13.4”D

Performance Features:

- Meets NEMA 3R requirements for cabinet enclosure.
- Constructed of 0.125” thick 5052-H32 aluminum.
- Doubled flanged door opening on all four sides.
- Slam Lock System that accepts #2 Corbin keys.
- Tamperproof 14 gauge stainless steel hinge.
- Closed-Cell Neoprene Gasket around the inside edges of the door.
- Louvered vents on the top left and bottom right sidewalls with bug screens.
- Back panel for equipment mounting.
- Mounting options for both flat and round surfaces.
- Conforms to NEC wiring specifications.
- Equipped with FDOT APL approved Model 204 Flasher Module
- 15A main circuit breaker, transient suppression and SPST power switch provided.
- Optional FDOT APL approved Time Switch.