


# Dialight

## LED Lamp Modules for Programmable Visibility (PV) Signals P46 Series

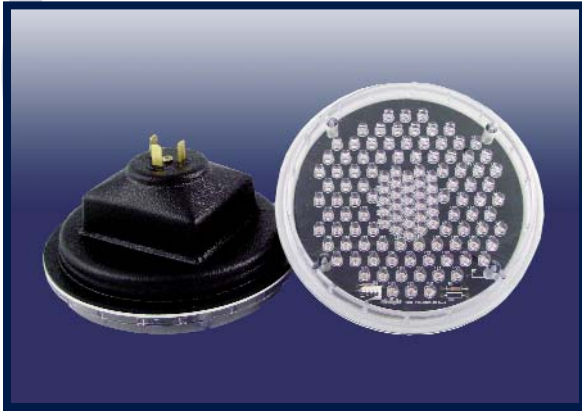

### FEATURES / BENEFITS

- ▲ Direct retrofit replacement for incandescent lamps used in Programmable Visibility (PV) signals
- ▲ Compatible with McCain and 3M signal heads
- ▲ CalTrans qualified
- ▲ 90% reduction in power vs. incandescent
- ▲ Long life; up to 10 times longer than incandescent
- ▲ Failure of single LED results in loss of light from that LED only
- ▲ Moisture and dust resistant

### SPECIFICATIONS

- ▲ Operating Voltage Range: 80VAC to 135VAC (120VAC nominal)
- ▲ Fuse and transient suppressor incorporated for line and load protection
- ▲ Operating Temperature Range: -40°C to +74°C
- ▲ Turn-On/Turn-Off Time = 75 msec max
- ▲ Power factor greater > 0.9
- ▲ Total harmonic distortion < 20%
- ▲ Meets FCC Title 47, Subpart B, Section 15 Regulations for electrical noise
- ▲ Conforms to MIL-STD-810F for blowing rain
- ▲ Written warranty available on request
- ▲ All products traceable by serial number

### P46 Series - 120 Volt Programmable Visibility Modules

| Part Number  | Color  | Dominant Wavelength (nm) | Typical Wattage @ 25°C | Minimum Luminous Intensity* (Cd) |
|--------------|--------|--------------------------|------------------------|----------------------------------|
| P46-3R33-003 | Red    | 622                      | 10                     | 500                              |
| P46-3Y33-003 | Yellow | 590                      | 17                     | 500                              |
| P46-3G33-003 | Green  | 505                      | 8                      | 500                              |

\*Initial: Measured at peak intensity point

**Dialight Corporation**

1501 Route 34 South • Farmingdale, NJ 07727 USA

Tel: (1) 732-919-3119 • Fax: (1) 732-751-5778 • www.dialight.com



MDTSPVX001\_F