

Clamp-On Meter Models 501, 502 & 503



The AEMC® Models 501, 502 and 503 are compact, professional clamp-on meters that measure up to the toughest standards. They are built into a rugged mechanical case and are designed using quality polycarbonate materials. These meters offer a complete set of measurement ranges and are in compliance with international safety and quality standards to ensure a professional and reliable measuring tool.

These reliable meters are simple to operate and are Auto-Ranging — always providing the optimum measurement range and resolution. They all measure 400Aac, 600Vac, 600Vdc, Resistance, and Continuity (with

beeper). The Models 501 and 502 also add a Frequency function sensed from either current or voltage. The Models 501 and 503 are average sensing for traditional load environments. The Model 502 is a True RMS clamp-on that provides RMS measurements for today's non-linear electrical environments, such as variable speed drives or computers. The Model 503 is a Hall Effect clamp-on that provides both DC and AC current measurements to 400A.

The Models 501, 502 and 503 are compact for comfortable one-handed operation. The tapered, hooked jaw design facilitates maneuvering in

crowded wiring and breaker panels, making it easy to select conductors. The jaw opening accommodates a 500MCM cable. The large and easy-to-read 4000-count LCD features comprehensive user information symbols, such as low battery, polarity, overload and an analog bargraph for easy trend readings. All models are equipped with a Data Hold function that freezes the measurement for later viewing.

They are supplied in a padded carrying pouch with leads, batteries and user manual — ready to go!

Features

- Compact size — fits into your pocket
- 400AAC or 400AAC/DC current measurements
- 600VAC/DC volts measurements
- TRMS measurements (Model 502)
- Resistance measurements to 400 Ω
- Continuity with beeper below 40 Ω
- Frequency measurements (Models 501 and 502) from V and A
- Hold function to “freeze” readings
- Push-button for easy ADC zeroing (Model 503)
- Large, easy-to-read 4000-count display
- 42-segment analog bargraph
- Supplied with test leads and soft carrying pouch

Applications

- Industrial, commercial, HVAC and residential troubleshooting
- Power panel, junction box and battery bank monitoring
- Electrical testing and troubleshooting on traditional and non-linear loads, such as adjustable speed drives and computers




Specifications

MODELS	501 (Average Sensing)	502 (TRMS)	503 (Average Sensing)
AC AMPERES (Auto-Ranging)			
Measurement Range	0.05 to 400A	0.05 to 400Arms	0.05 to 400A
Resolution	0.01A	0.01A	0.01A
40A	0.1A	0.1A	0.1A
400A			
Accuracy	±1.9% of Reading ± 5cts ±2.5% of Reading ± 5cts	±1.9% of Reading ± 5cts ±2.5% of Reading ± 5cts	±1.5% of Reading ± 10cts ±2.5% of Reading ± 10cts
50 to 60Hz 60 to 500Hz			
Overload Protection	600Arms	600Arms	600Arms
AC VOLTS (Auto-Ranging)			
Measurement Range	0.5 to 600V	0.5 to 600Vrms	0.5 to 600V
Resolution	0.1V	0.1V	0.1V
400V	1V	1V	1V
600V			
Accuracy	±0.8% of Reading ± 5cts ±1.5% of Reading ± 5cts	±1.5% of Reading ± 5cts ±1.5% of Reading ± 5cts	±0.8% of Reading ± 5cts ±1.5% of Reading ± 5cts
50 to 60Hz 60 to 500Hz			
Input Impedance	1MΩ	1MΩ	10MΩ
Overload Protection	600Vrms	600Vrms	600Vrms
DC AMPERES (Auto-Ranging)			
Measurement Range	-	-	0.10 to 400A
Resolution	-	-	0.01A
40A	-	-	0.1A
400A	-	-	
Accuracy	-	-	±2.5% of Reading ± 10cts
Overload Protection	-	-	600Arms
DC VOLTS (Auto-Ranging)			
Measurement Range	0.2 to 600V	0.2 to 600V	0.2 to 600V
Resolution	0.1V	0.1V	0.1V
400V	1V	1V	1V
600V			
Accuracy	±1% of Reading ± 2cts	±1% of Reading ± 2cts	±1% of Reading ± 2cts
Input Impedance	1MΩ	1MΩ	10MΩ
Overload Protection	600Vrms	600Vrms	600Vrms
RESISTANCE-OHMS (Ω)			
Measurement Range	0.2 to 400Ω	0.2 to 400Ω	0.2 to 400Ω
Resolution	0.1Ω	0.1Ω	0.1Ω
Accuracy	±1% of Reading ± 2cts	±1% of Reading ± 2cts	±1% of Reading ± 2cts
Max Test Voltage	1.5Vdc	1.5Vdc	1.5Vdc
Overload Protection	600Vrms	600Vrms	600Vrms
CONTINUITY (••))			
Beeper Activation	< 40Ω	< 40Ω	< 40Ω
Max. Test Voltage	1.5Vdc	1.5Vdc	1.5Vdc
Overload Protection	600Vrms	600Vrms	600Vrms
FREQUENCY (Hz) (Auto-Ranging)			
CURRENT INPUT			
Range	20Hz to 4kHz	1Hz Resolution	-
>4kHz to 10kHz	10Hz Resolution	10Hz Resolution	-
Accuracy	±0.1% of Reading ± 1ct	±0.1% of Reading ± 1ct	-
Min Input Signal	2Arms	2Arms	-
Input Impedance	1MΩ	1MΩ	-
Overload Protection	600Arms	600Arms	-
VOLTAGE INPUT			
Range	10Hz to 4kHz	1Hz Resolution	-
>4kHz to 40kHz	10Hz Resolution	10Hz Resolution	-
>40kHz to 400kHz	100Hz Resolution	100Hz Resolution	-
Accuracy	±0.1% of Reading ± 1ct	±0.1% of Reading ± 1ct	-
Min Input Signal	4kHz	5Vrms	-
40kHz	5Vrms	5Vrms	-
400kHz	5Vrms	5Vrms	-
Input Impedance	1MΩ	1MΩ	-
Overload Protection	600Vrms	600Vrms	-

Specifications

MODELS	501 (Average Sensing)	502 (TRMS)	503 (Average Sensing)
GENERAL			
Digital Display	3 3/4 digits LCD display, 4000-count (max. reading 3999)		
Analog Display	Fast 42-segment analog bargraph display		
Symbol and Scale Range	Automatic according to range and input signal		
Polarity	■ Displayed when negative signal applied to input		
Overload	⊗L Displayed when input signal exceeds range		
Sample Rate	2 samples/sec for the digital display, 20 samples/sec for the analog bargraph		
Power Supply	Two 1.5V AAA batteries		
Auto-Off	30 minutes		
Low Power Indication	⊕ Displayed when the battery is below the required voltage		
Jaw Opening Size Ø	1.1" (28mm) – facilitates 500MCM cable		
Dimension	7.60 x 1.97 x 1.1" (193 x 50 x 28mm)		
Weight	8.11 oz (230g) with batteries		
ENVIRONMENTAL			
Altitude	2167 ft (2000m) max.		
Operating Temperature	32° to 104°F (0° to 40°C), <80% RH, non-condensing		
Storage Temperature	14° to 140°F (-10° to 60°C), <70% RH, battery removed		
Pollution Degree	2		
SAFETY			
Safety Rating	EN 61010, 600V, Cat. II, EN 61010, 300V, Cat. III		
CE Mark	Yes		

Construction

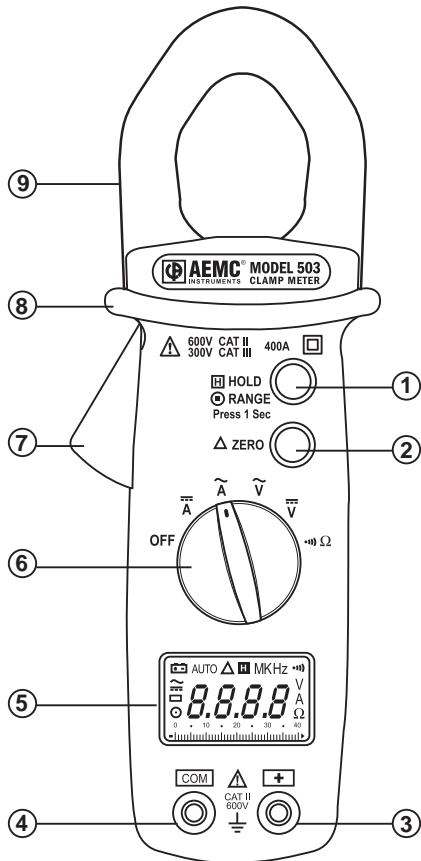

Function	Model 501	Model 502	Model 503
TRMS	–	✓	–
400AAC	✓	✓	✓
400A _{dc}	–	–	✓
600V _{AC}	✓	✓	✓
600V _{dc}	✓	✓	✓
Resistance	✓	✓	✓
Continuity	✓	✓	✓
Beeper	✓	✓	✓
Frequency	✓	✓	–
Bargraph	✓	✓	✓
Hold	✓	✓	✓
Push button DC Zero	–	–	✓

1. Data hold and ranging button (Blue)
2. DC zero button (Blue)
3. Positive (Red) + input jack
4. COM (Black) – input jack
5. LCD display with bargraph
6. Rotary range selector switch
7. Lever for jaw opening/closing
8. Safety barrier – anti-slip guard
9. Jaw assembly

Selection Chart



MODEL	501	502	503
Catalog No.	2117.21	2117.66	2117.22
Type	AC	AC TRMS	AC/DC
AC Current	0.05 to 400A	0.05 to 400A	0.05 to 400A
AC Voltage	0.5 to 600V	0.5 to 600V	0.5 to 600V
DC Current	-	-	0.10 to 400A
DC Voltage	0.2 to 600V	0.2 to 600V	0.2 to 600V
Resistance (Ω)	400 Ω	400 Ω	400 Ω
Continuity	<40 Ω	<40 Ω	<40 Ω
Frequency (Hz)			
Current	20Hz to 10kHz	20Hz to 10kHz	-
Voltage	10Hz to 400kHz	10Hz to 400kHz	-
True RMS	-	Yes	-
Jaw Size	1.1" (28mm)	1.1" (28mm)	1.1" (28mm)
Dimension	7.60 x 1.97 x 1.1"	7.60 x 1.97 x 1.1"	7.60 x 1.97 x 1.1"



Models 501, 502 & 503 are supplied with a pair of test leads and soft carrying case

ORDERING INFORMATION

CATALOG NO.

- Clamp-on Meter Model 501 (AC, 400AAC, 600VAC/DC, Ohms, Continuity) **Cat. #2117.21**
- Clamp-on Meter Model 502 (TRMS, 400AAC, 600VAC/DC, Ohms, Continuity) **Cat. #2117.66**
- Clamp-on Meter Model 503 (AC/DC, 400AAC/DC, 600VAC/DC, Ohms, Continuity) **Cat. #2117.22**

All clamp-on meters are supplied with a pair of test leads (red/black with probe tips), batteries, soft carrying case and a user manual

Contact Us

United States & Canada:

Chauvin Arnoux®, Inc.
d.b.a. AEMC® Instruments
200 Foxborough Blvd.
Foxborough, MA 02035 USA
(508) 698-2115 • Fax (508) 698-2118
www.aemc.com

Customer Support – for placing an order, obtaining price & delivery:
customerservice@aemc.com

Sales Department – for general sales information:
sales@aemc.com

Repair and Calibration Service – for information on repair & calibration, obtaining a user manual:
repair@aemc.com

Technical and Product Application Support – for technical and application support:
techinfo@aemc.com

Webmaster – for information regarding www.aemc.com:
webmaster@aemc.com

South America, Australia & New Zealand:

Chauvin Arnoux®, Inc.
d.b.a. AEMC® Instruments
15 Faraday Drive
Dover, NH 03820 USA
(978) 526-7667 • Fax (978) 526-7605
export@aemc.com

All other countries:

Chauvin Arnoux
190, rue Championnet
75876 Paris Cedex 18, France
33 1 44 85 45 28 • Fax 33 1 46 27 73 89
info@chauvin-arnoux.com